

6

5


4

3

2

1

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

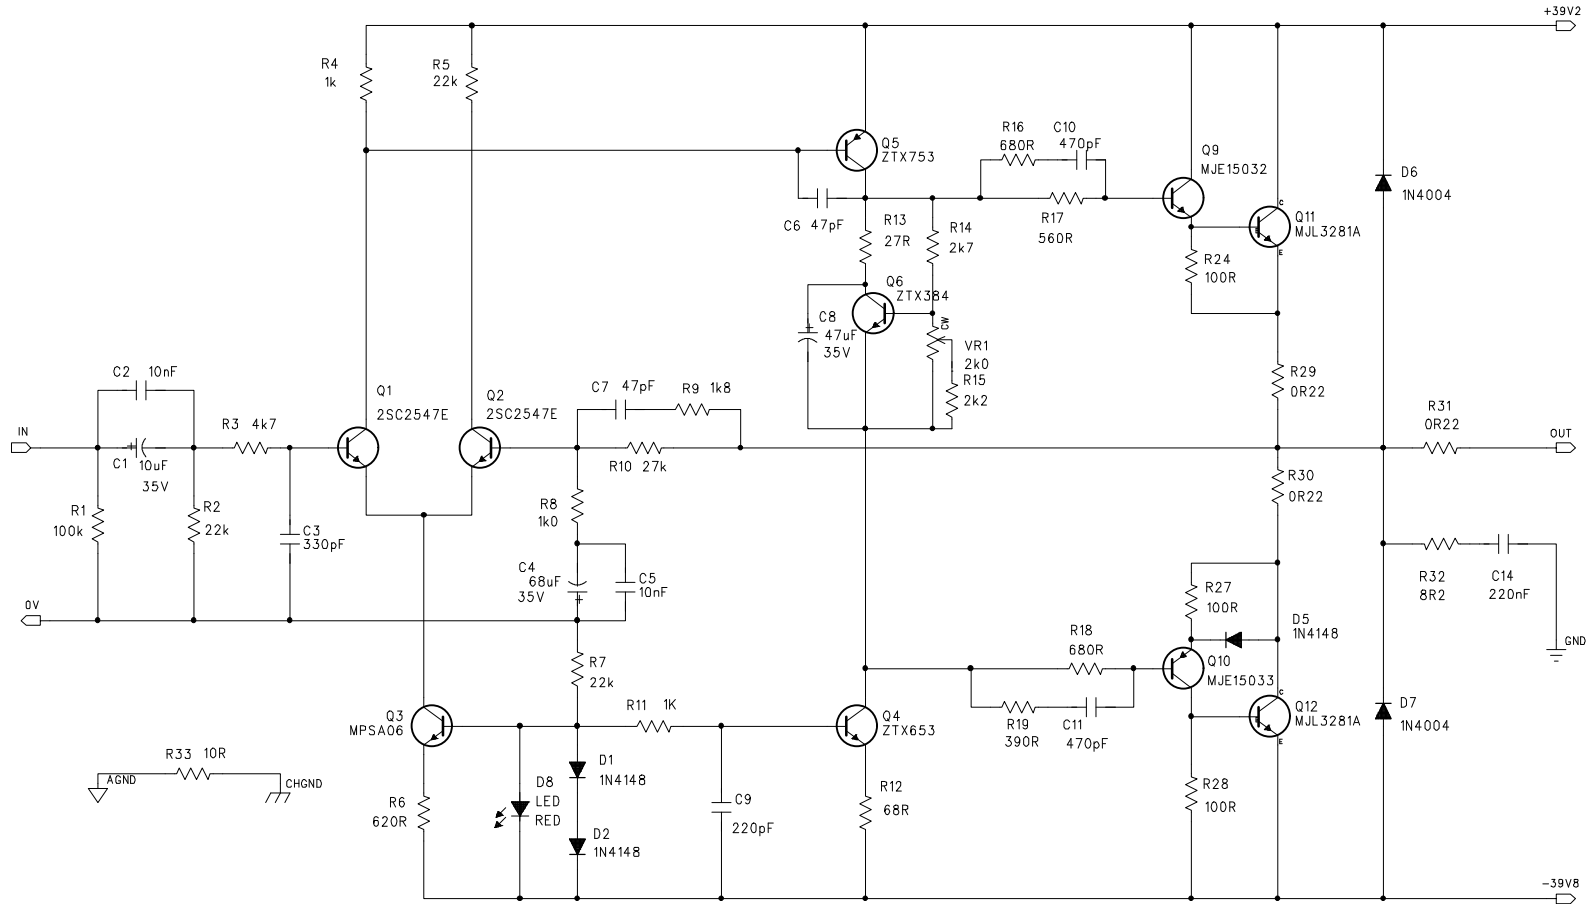

Note 1: Use EITHER (D1 & D2) OR (D8) [ EITHER 2 diodes OR 1 LED ]  
If using LED, make R6 1KΩ and R12 110R

Note 2: R33 Optionally connects quiet and noisy ground on some PCBs

Note 3: No overcurrent protection on this schematic!

DRAWN:	DATED:
CHECKED: JKN	DATED: 15Mar99
QUALITY CONTROL:	DATED:
RELEASED:	DATED:

COMPANY:			
TITLE:			
'N135' Power Amplifier			
CODE:	SIZE:	DRAWING NO:	REV:
SCALE:			SHEET: OF